

TG28080HA2/3/6BL-C Jiulong all-metal axial exhaust fan

SKU: 628609960220

Price: \$67.14

Categories: Fans

Tags: Jiulong

Product Link:

<https://www.electspares.com/product/tg28080ha2-3-6bl-c-jiulong-all-metal-axial-exhaust-fan/>

Product Description

TG28080HA2/3/6BL-C Jiulong all-metal axial exhaust fan

Size: 280mm x 280mm × 80mm

Airflow: 1098-116OCFM

Weight: 2803g

Noise: 69-70dB(A)

Wind blade Impler Material: Metal

Frame: Aluminum Alloy

Terminals: 0.5mm

Lead Wire: Teflon22#UL 1332(Optional)

Motor: Capacitor-Run And External Rotor Induction Motor

Temperature rangeOperating Temperature: -10°C~+65°C

Full metal casing

Full metal shell with high hardness, wear resistance and light weight

Smooth surface and other characteristics

high strength metal

Thickened blades

High temperature resistance

High strength, not easy to deform and break

Large air volume and low noise

High temperature baking paint

The surface of the shell has been treated with high-temperature paint to resist wear and scratches, and the surface is glossy and not easy to stick to dust.

Ningbo Jiuya

Easy to clean, long lasting like new

Double import

ball bearings

Low vibration, high rotational speed, stable operation and long service life

Product parameters

Model: TG28080HA2BL

TG28080HA2BL-C 220V

TG28080HA3BL three-phase 380V

TG28080HA6BL-C single phase 380V

Minimum order quantity of 5 units, please contact customer service for details, 5 units per box



Customized model

Additional Information

sort by color: TG28080HA2BL-C 220V, TG28080HA3BL three-phase 380V, TG28080HA6BL-C single phase 380V, Minimum order quantity of 5 units, please contact customer service for details, 5 units per box, Customized model

Product Images



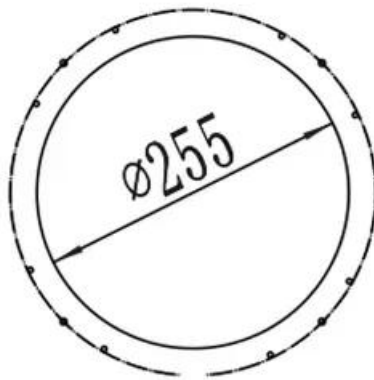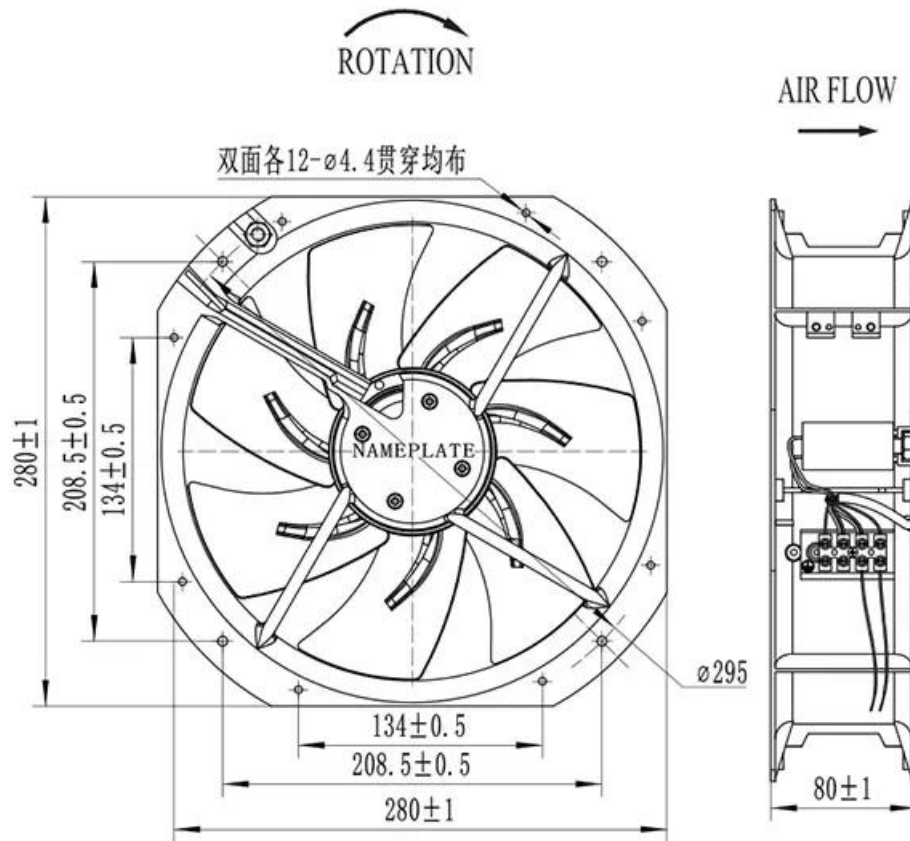

Inlet



Outlet

尺寸 Size: 280mm × 280mm × 80mm

风量 Airflow: 1098–1160CFM

重量 Weight: 2803g

噪音 Noise: 69–70dB(A)

风叶 Impeller Material: Metal

外框 Frame: Aluminum Alloy


端子 Terminals: 0.5mm

引线 Lead Wire: Teflon22#UL 1332(Optional)

马达 Motor: Capacitor-Run And External Rotor Induction Motor

温度范围 Operating Temperature: -10°C~+65°C

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μF/VAC
TG28080HA _B -C	Ball	100/125	50/60	1.2/1.3	126/148	2500/2800	69/70	1098/1160	1	2.8/250
TG28080HA _B -C	Ball	200/240	50/60	0.58/0.63	126/148	2500/2800	69/70	1098/1160	1	4/500
TG28080HA _B	Ball	380/420	50/60	0.75/0.9	120/136	2500/2800	69/70	1098/1160	3	—
TG28080HA _B -C	Ball	380/420	50/60	0.24/0.25	120/136	2500/2800	69/70	1098/1160	1	2/500

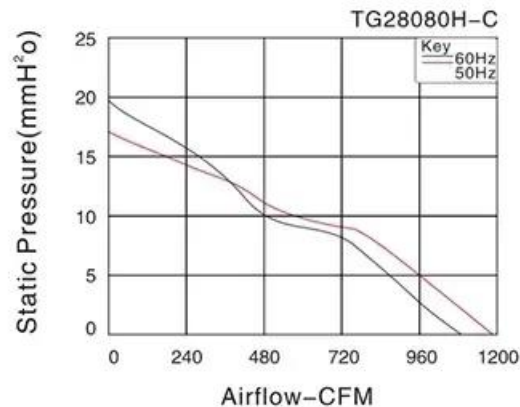

Scan for product details:

