

YEE SEN VP-12/15/20/30/40-FA3/FA2/FA1 voil pump

SKU: 592790385186

Price: \$94.28

Categories: Hydraulics

Product Link:

<https://www.electspares.com/product/yee-sen-vp-12-15-20-30-40-fa3-fa2-fa1-voil-pump/>

Product Description


Taiwan YEE SEN oil pump VP-12/15/20/30/40-FA3/FA2/FA1 variable vane pump

Additional Information

sort by color: VP-12-FA3 (Taiwan Yisheng), VP-15-FA3 (Taiwan Yisheng), VP-20-FA3 (Taiwan Yisheng), VP-30-FA3 (Taiwan Yisheng), VP-40-FA3 (Taiwan Yisheng), VP-SF-20-D (Taiwan Yisheng), VHIF-30 (Taiwan Yisheng)

Product Images



Series: **VHOF****FEATURES:**

- * Save horse power and low noise level.
- * Wear and heat resistance.
- * High volumn efficiency.
- * Smooth running and stable operation particular suitable for machine tools and single-purpse machines.

特點：

- * 省馬力、低噪音。
- * 不易生熱、耐磨耗。
- * 高容積效率。
- * 運轉圓滑、作動穩定，特別適用工作機械、專用機械。

MODEL CODING 型式號碼

VHOF - F - ※ - ※ - ※

X: 有記號軸心 $\phi 15.875$, 無記號軸心 $\phi 12.7$

Pressure Rang (壓力調整範圍)

A: 8~18 kgf/cm² (114~257psi)

B: 15~35 kgf/cm² (214~500psi)

C: 30~55 kgf/cm² (428~785psi)

D: 50~70 kgf/cm² (714~1000psi)

Standard Delivery (ℓ/min) 標準排量 8, 12, 15, 20 (ℓ/min)

Flange Type 法蘭型

Model Number 型式號碼

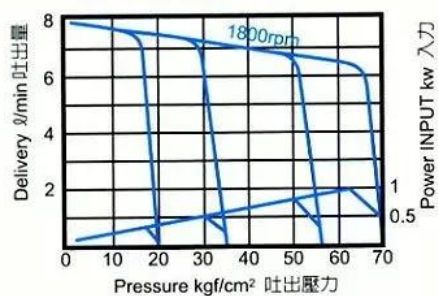
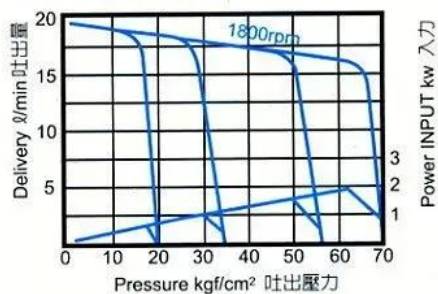
SPECIFICATION 規格說明：

Model Coding 型式號碼	Item 項目	No-Load Delivery (ℓ/min) 無負載容量	Adjusting Pressure Range (kgf/cm ²) 壓力調整範圍	Speed (rpm) 速度 (迴轉數/每分鐘)		Weight (kgf)(lbs) 重量 公斤(磅)
				Max. (最高)	Min. (最低)	
VHOF-8		8	A: 8~18 kgf/cm ² (114~257psi) B: 15~35 kgf/cm ² (214~500psi) C: 30~55 kgf/cm ² (428~785psi) D: 50~70 kgf/cm ² (714~1000psi)	1800	800	5.6公斤 (12.3磅)
VHOF-12		12				
VHOF-15		15				
VHOF-20		20				

★Design and specifications are subject to change without prior notice. 本表格數據若有變更，恕不另行通知。

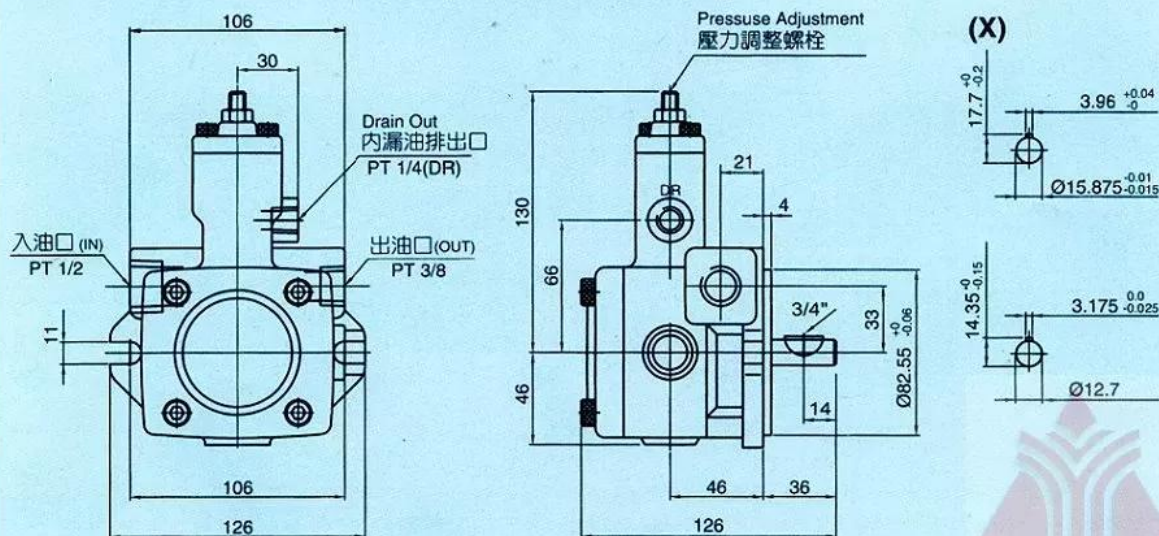
★Customer's design are available. 歡迎客戶提供設計。


■ PERFORMANCE CURVEDIMENSIONS 性能曲線

Series: **VHOF-8**Series: **VHOF-12**Series: **VHOF-15**Series: **VHOF-20**

■ DIMENSIONS 尺寸圖

VHOF-8, VHOF-12, VHOF-15, VHOF-20



Series: **VHIF****FEATURES:**

- * Save horse power and low noise level.
- * Wear and heat resistance.
- * High volumn efficiency.
- * Smooth running and stable operation particular suitable for machine tools and single-purpse machines.

特點：

- * 省馬力、低噪音。
- * 不易生熱、耐磨耗。
- * 高容積效率。
- * 運轉圓滑、作動穩定，特別適用工作機械、專用機械。

MODEL CODING 型式號碼

VHIF - **F** - ※ - ※

Pressure Rang (壓力調整範圍)

A: 8~18 kgf/cm² (114~257psi)

B: 15~35 kgf/cm² (214~500psi)

C: 30~55 kgf/cm² (428~785psi)

D: 50~70 kgf/cm² (714~1000psi)

Standard Delivery (ℓ/min) 標準排量 25, 30, 40 (ℓ/min)

Flange Type 法蘭型

Model Number 型式號碼

SPECIFICATION 規格說明：

Model Coding 型式號碼	Item 項目	No-Load Delivery (ℓ/min) 無負載容量	Adjusting Pressure Range (kgf/cm ²) 壓力調整範圍	Speed (rpm) 速度 (迴轉數/每分鐘)		Weight (kgf)(lbs) 重量 公斤(磅)
				Max. (最高)	Min. (最低)	
VHIF-25		25	A: 8~18 kgf/cm ² (114~257psi) B: 15~35 kgf/cm ² (214~500psi) C: 30~55 kgf/cm ² (428~785psi) D: 50~70 kgf/cm ² (714~1000psi)	1800	800	9.5公斤 (20.8磅)
VHIF-30		30				
VHIF-40		40				

★ Design and specifications are subject to change without prior notice. 本表格數據若有變更，恕不另行通知。

★ Customer's design are available. 歡迎客戶提供設計。

Scan for product details:

