

PAC16P-DC120-300A-NN-11 XIMANDUN voltage regulator

SKU: 656229865357

Price: \$257.13

Categories: Relays

Product Link:

<https://www.electspares.com/product/pac16p-dc120-300a-nn-11-ximandun-voltage-regulator/>


Product Description

PAC16P-DC120-300A-NN-11 Beijing Shimanton single-phase intelligent voltage regulator.

Additional Information

sort by color: DC120-300A, DC120-340A, DC180-400A, DC120-250A, DC100-200A, DC100-150A, DC120-200

Product Images

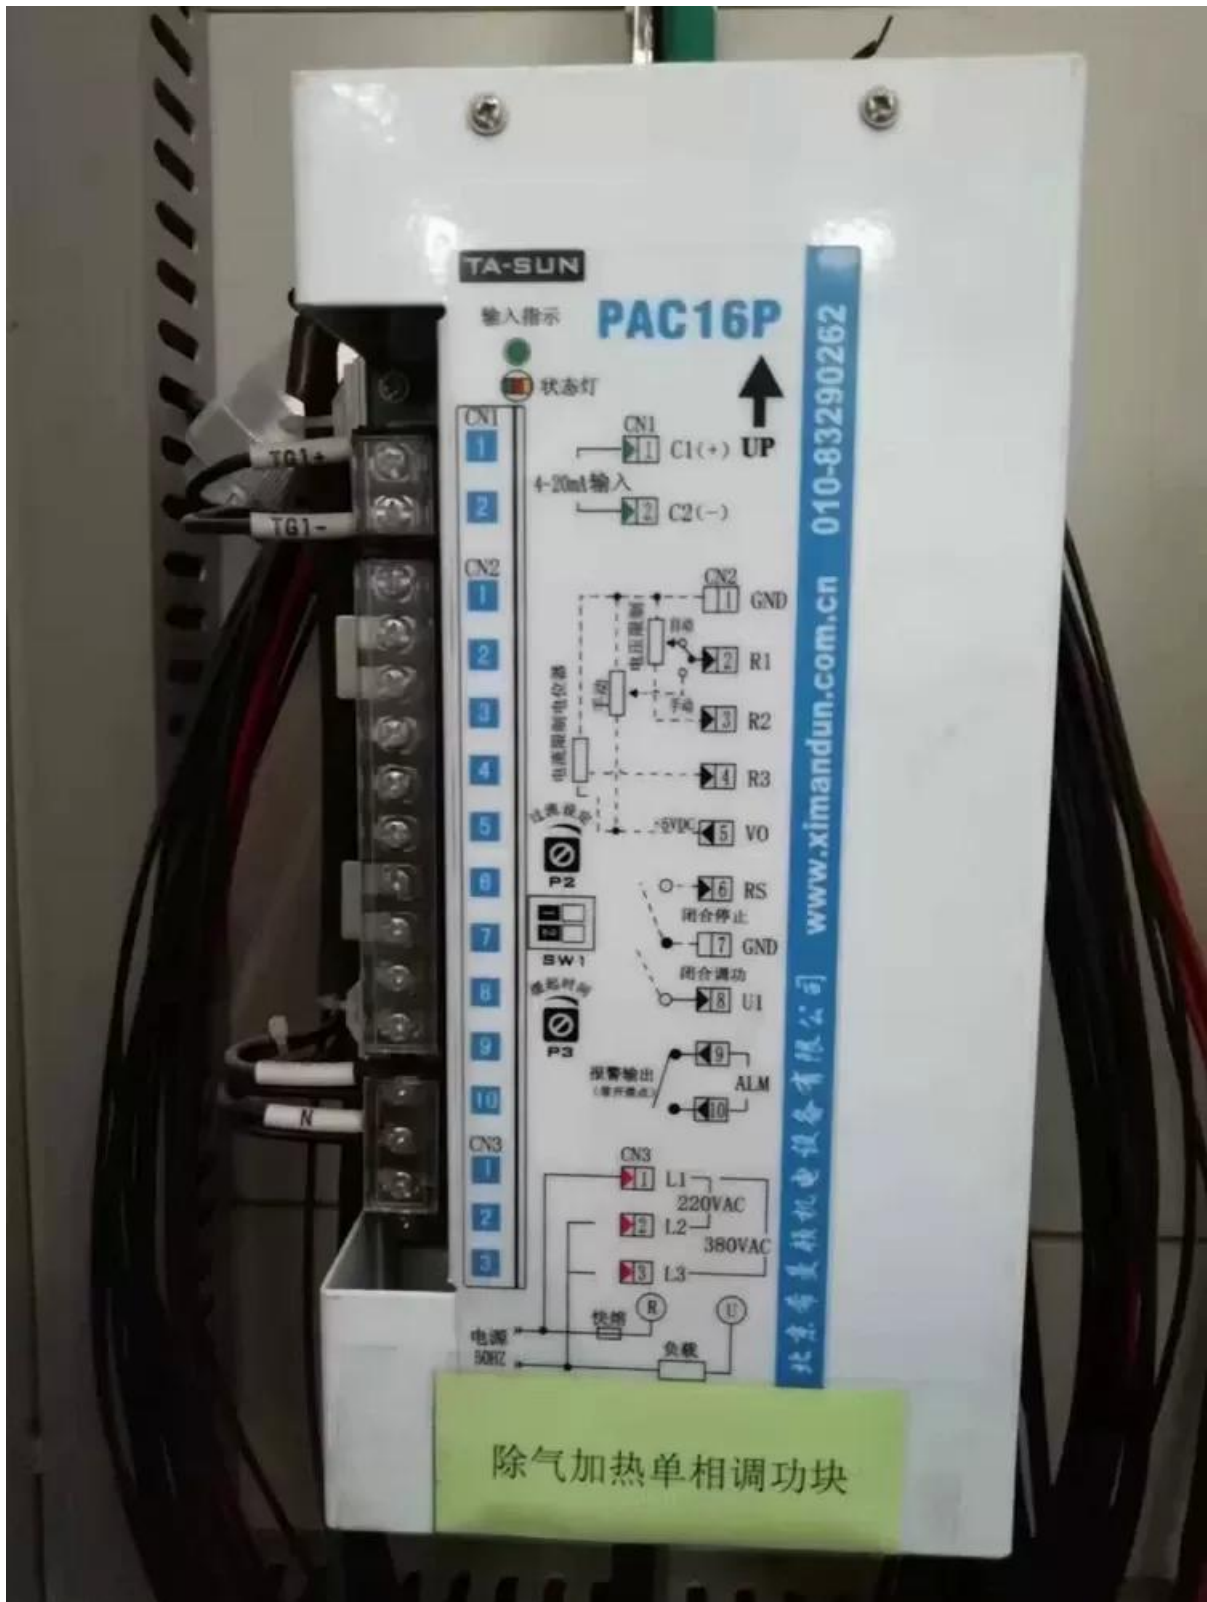



型号	标称电流	额定电流	尺寸 mm	孔距	冷却方式
PAC16P-B90-120-NON-11	120A	60A	220*93*167 (型材散热)	Φ4mm 210mm	自然
PAC16P-B90-150-NON-11	150A	75A			风冷
PAC16P-B90-200-NON-11	200A	100A			
PAC16P-B90-220-NON-11	220A	110A			
PAC16P-B90-250-NON-11	250A	125A			
PAC16P-B120-120-NON-11	120A	60A	242*110*210 (风机散热)	Φ4mm 160*100mm	风冷
PAC16P-B120-150-NON-11	150A	75A			
PAC16P-B120-200-NON-11	200A	100A			
PAC16P-B120-220-NON-11	220A	110A			
PAC16P-B120-250-NON-11	250A	125A			
PAC16P-B160-200-NON-11	200A	105A	245*162*200	Φ10mm 225*110mm	风冷
PAC16P-B160-220-NON-11	220A	115A			
PAC16P-B160-250-NON-11	250A	130A			
PAC16P-B160-300-NON-11	300A	150A			
PAC16P-B160-340-NON-11	340A	170A			
PAC16P-B227-220-NON-11	220A	120A	250*230*210	Φ10mm 230*140mm	风冷
PAC16P-B227-300-NON-11	300A	155A			
PAC16P-B227-340-NON-11	340A	175A			
PAC16P-B375-400-NON-11	400A	200A	377*137*286	Φ10mm 355*90mm	风冷
PAC16P-B375-500-NON-11	500A	250A			

单相电力调整器>PAC16P系列单相调功调压一体化电力调整器

PAC16P集单相调压/调功方式为一体。

具有上电缓启动、缓关断、散热器超温、电流限制、过流保护，适用于电阻性负载和感性负载，可广泛用于工业各领域的功率调整。

输入	负载电源和同步电压	50Hz 单相220VAC/380VAC (60Hz订货声明)
	自动控制信号	4~20mA, 接收阻抗120Ω
	风机电源	220VAC 50Hz
输出	调节输出分辨率	调压: 0.6度; 调功: 0.2°
	驱动输出	①输出: 12V脉冲, 可变脉宽, 最大驱动电流<30mA, 配合P型SSR, 调压/调功方式为一体 ②脉冲变压器输出: 开槽脉冲, 配合MTX/MFC反并联模块, 实现单相调压及全控整流, 但无调功方式。
保护	缓起、缓停 (无电压接点输入)	闭合 (ON): 缓关断, 时间固定3秒; 开路 (OFF): 运行。(缓启动时间由内部电位器P3设定0.2~120秒) 不接: 运行状态。
	急停与自动缓启动	运行中的过流、超温急停, 过流、超温保护动作时间不大于一个电源周期(20ms)。
	超温保护、过流保护 (常开接点继电器)	散热器温度高于80℃禁止输出并报警, 过流时禁止输出并报警。 解除: 故障排除后, 重新上电。报警继电器: 纯组1A250VAC
使用环境	安装环境	壁挂式垂直安装、通风良好, 不受日光直射或热辐射、无腐蚀性、无可燃性
	高度湿度	高温高湿以及海拔大于1000米, 应降额使用, 环境相对湿度: 90%
	温度	-10℃~+55℃

Scan for product details:

